


V+LTAB-X®

Advanced Electrified Solutions.

Your new opportunities.

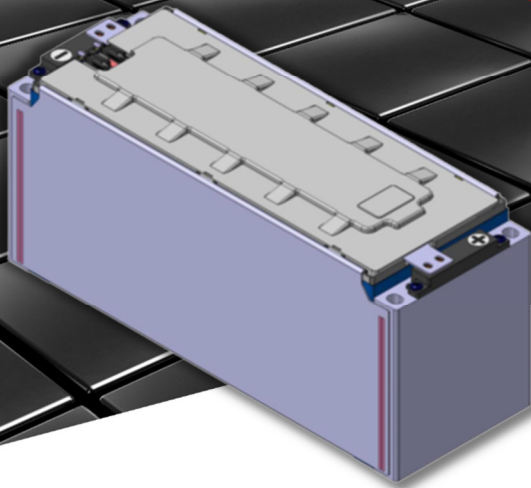

TB 228 Modules

Parameter	TB 22808	TB 22809	TB 22812	Unit
Battery Specification at 25°C				
Technology	Lithium Iron Phosphate			
Rated Voltage	25.6	28.8	38.4	V
Rated Capacity	228			Ah
Rated Energy	5.83	6.56	8.75	kWh
Discharge Current	228 (peak)			A
Charge Current	228 (peak)			A
Dimensions	508 x 179 x 222	558 x 179 x 222	724 x 179 x 222	mm
Weight	~40	~44	~56	kg
Connection	8s1p	9s1p	12s1p	
Temperature Range				
Discharging	0 to +45			°C
Charging	0 to +45			°C
Storage	0 to +45			°C
General Properties				
Cell	High quality, commercial vehicle cell with second source capability			
Certifications	CE, UN38.3			